

# Move Forward With



## The new torch-applied roofing membrane that reduces liability, call-backs, and tires in the landfill

**Ecotorch®** is an innovative torch-applied membrane that truly contributes to the environment. Incorporating recycled tires into SBS modified bitumen, ecotorch is a more durable, dependable, and eco-friendly roofing membrane than APP modified bitumen membranes.

### AVAILABLE COLORS:

Custom colors available for minimum run of 150 rolls (±15%)



Black CC028



White CC016



Buff CC019



Shakewood CC046



Pewter Gray CC010A



Weathered Wood CC004




Hickory CC047



Yosemite Green CC074A

### FEATURES:

- Same application process – no retraining necessary
- Vastly superior to APP in nearly every way – at roughly the same price
- Superior end-lap, metal, and granule adhesion
- Superior low-temperature flexibility
- Reduces liability
- Fewer call-backs
- Recycled content helps the environment
- Available in 8 different shingle blends/solid colors. Custom colors available for minimum run of 150 rolls (±15%)
- Each roll uses approximately one half of one passenger tire
- More efficient torch-down system uses less heat/propane

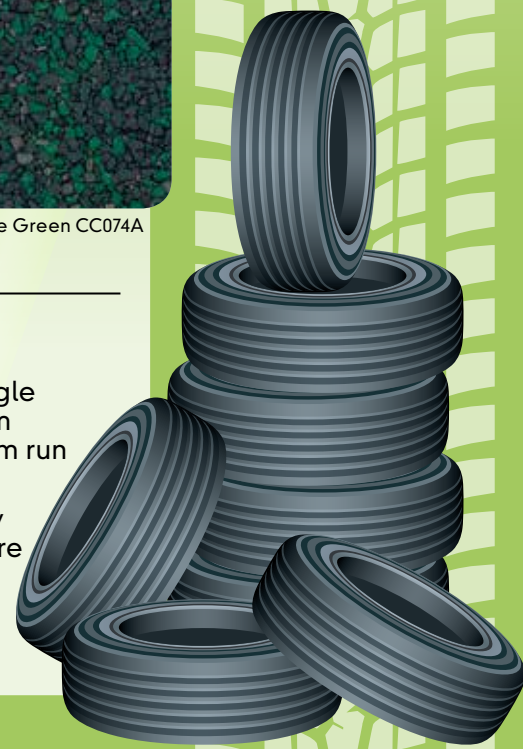



**GENERAL APPLICATIONS**

**Ecotorch®** is designed as a superior modified bitumen torch-applied roofing membrane (with appropriate base sheet or interply sheets) for flashing, new roofing, and re-roofing applications. It's also an ideal membrane for repair of built-up roofing membranes. See MBTechnology Specification Manual for installation instructions.

**STORAGE**

Store rolls on end in a dry location. Keep materials clean and away from excessive heat. Do not lay flat. Keep materials off of the ground. Store on pallets or similar (pallets should not be stored more than two high without protective bracing). Cover rolls with opaque tarp.

Store in areas where temperature is between 50° F and 90° F.

**WARRANTIES**

**Ecotorch G** (Granules) carries a 12-year limited material warranty. Workmanship guarantees are available for MBTechnology "eligible contractors." Material warranties and workmanship guarantees require materials be installed in compliance with the recommendations contained in the MBTechnology specification manual. Incorporating Ecotorch S (Smooth) as an underlayer can extend the warranty to 20 years.

**Technical Specification (Nominal)**

PRODUCT NAME	<b>ecotorch G</b>	<b>ecotorch S</b>
REINFORCEMENT	Polyester mat	Polyester mat
APPLICATION	Heat weld	Heat weld
COVERAGE	1 Square	1 Square
WEIGHT PER ROLL (LBS.)	102	85
SURFACING	Granules (8 colors available)	Smooth
ASTM REFERENCE	ASTM 6164 Type-G	ASTM 6164 Type-S



**PROPOSITION 65 WARNING**  
 THIS PRODUCT CONTAINS CHEMICALS KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER OR BIRTH DEFECTS OR OTHER REPRODUCTIVE HARM  
CALIFORNIA HEALTH AND SAFETY CODE SECTION 25249.6 www.oehha.ca.gov

Since 1983, MBTechnology has provided quality roofing and underlayment systems to vendors throughout the nation.



188 South Teilman Ave, Fresno CA 93706-1334 - 559-233 2181  
 Technical Hotline: 800-621 9281 FAX: 559-233 4607  
 www.mbtechnology.com info@mbtechnology.com