

PRODUCT DATA SHEET



layfastSBS® Underlayment/Base

TU70

USAGE: Underlayment / Base
 Tile, Shingle, Shake and Metal (excluding copper & zinc)
 Waterproof base for torch down APP, SBS & BUR system

APPLICATION: Mechanical
 Secure with 1" Head Nails / Staples shall not be used

PACKAGING: Paper Wrapped
 36 rolls/pallet

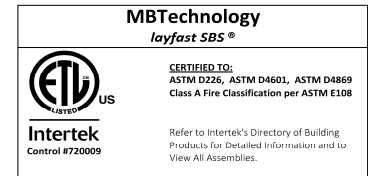

	UNIT	STANDARDS								MBTECHNOLOGY NOMINAL	
		ASTM D226		ASTM D4601		ASTM D4869		ASTM D6757	ICC AC165		
		Type 1	Type 2	Type 1	Type 2	Type 3	Type 4	Type 2	-		
Reinforcement	-	Fiberglass Mat (Asbestos-Free)									
Top Surfacing	-	Sand									
Bottom Surfacing	-	Sand									
Accumulated Time of Exposure (max)	Days	90 However, MBT recommends that <i>layfast SBS</i> ® be covered by an approved roof covering as soon as possible.									
Roll Coverage	Squares	1									
Lay Lines	inches	2 - 4 - 6 - 19									
Roll Weight	lbs									68	
Roll Length	ft + inches									32' 6"	
Roll Width	inches									39.75	
Thickness	mil									83	
Net Mass	lbs/100ft²	11.5	26	13.4	15.5	20	26	-	15.5	63	
Breaking Strength @ 23°C MD	lbs/in	30	40	22	44	40	40	-	40	MD	78
Breaking Strength @ 23°C CD	lbs/in	15	20	22	44	20	20	-	40	CD	57
Pliability	½" Radius	Shall Not Crack								MD & CD	Pass
	¾" Radius									MD & CD	Pass
Loss on Heating @ 105°C for 5 hours	% max	4	4	-	-	6	6	4	4	≤ 0.30	
Moisture @ Time of Manufacture	% max	4.3	4.1	1	1	2	2	-	1	≤ 0.40	
Liquid Water Transmission	4 hrs min	-	-	-	-	Pass	Pass	Pass	Pass	Pass	
Mass of Desaturated Glass Mat	lbs/100ft²	-	-	1.4	1.7	-	-	-	1.7	≥ 1.70	
Ash of Glass Mat Only	%	-	-	70-88	70-88	-	-	-	70-88	Pass	
Dimensional Stability D5147/D1204	% max	-	-	-	-	-	-	-	-	MD & CD	< 0.12
Dimensional Stability F1087	% max	-	-	-	-	1.75	1.75	1.65	1.65	MD & CD	< 0.12
Resistance to Growth of Mold D3273	% max	-	-	-	-	-	-	-	-	No Fungal Growth	
Water Vapor Transmission E96 Proc A	Permeance (US perms)	-	-	-	-	-	-	-	-	≤ 0.026 *	

* Meets Class I Vapor Retarder as defined by the IBC

ADDITIONAL INFORMATION

LEED	Recycled Content: 0%	Production Location: Fresno, California U.S.A.
------	----------------------	------------------------------------------------



188 S. Teilman Avenue Fresno, California 93706-1334 U.S.A.
 Toll Free: 800-621-9281 Fax: 559-233-4607 www.mbtechnology.com



TR-S-MBT